


Lightning Cable | USB 2.0 | Apple Lightning 8-Pin | USB-A Male | 480 Mbps | Gold Plated | 3.00 m | Round | Braided / Nylon | Aluminium | Cover Window Box

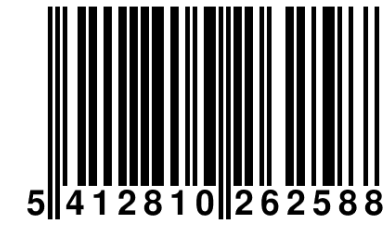

Product specifications CCTB39300AL30:

| | | | |
|---------------------------|-----------------------|-------------------------------|------------------|
| AWG value | 27/19 | | Nylon |
| Cable design | Round | Maximum transfer rate | 480 Mbps |
| Cable length | 3.00 m | Number of products in package | 1 pcs |
| Cable mantle material | Braided | Output current | 2.4 A |
| | Nylon | Output power | 12 W |
| Cable mantle size | 3.8 mm | Packaging | Cover Window Box |
| Cable type | Lightning | USB technology | USB 2.0 |
| Colour | Aluminium | | |
| Conductor material | Tinned Copper | | |
| Connector A | Apple Lightning 8-Pin | | |
| Connector B | USB-A Male | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | Aluminium | | |
| Connector plating | Gold Plated | | |
| Material | Aluminium | | |

Packaging information:

| | |
|--------------------|---------------|
| Brand | Nedis |
| Order code | CCTB39300AL30 |
| EAN single Product | 5412810262588 |
| EAN Inner Carton | 5412810390007 |
| EAN Outer Carton | 5412810361175 |
| Packaging | Cover box |
| Package contents | USB cable |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|--------|
| 1 | 25 mm | 235 mm | 85 mm | 136 g |
| 10 | 180 mm | 245 mm | 175 mm | 1454 g |
| 60 | 380 mm | 275 mm | 535 mm | 9520 g |

