


USB Cable | USB 2.0 | USB-A Male | USB-C™ Male | 15 W | 480 Mbps | Gold Plated | 2.00 m | Round | Braided / Nylon | Aluminium | Cover Window Box

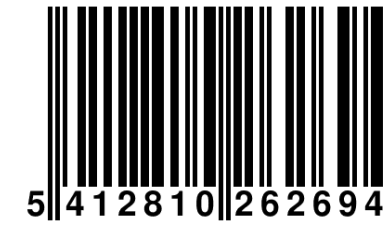

Product specifications CCTB60600AL20:

| | | | |
|---------------------------|---------------|-------------------------------|------------------|
| AWG value | 28/22 | Maximum transfer rate | 480 Mbps |
| Cable design | Round | Number of products in package | 1 pcs |
| Cable length | 2.00 m | Output current | 3.0 A |
| Cable mantle material | Braided | Output power | 15 W |
| | Nylon | Packaging | Cover Window Box |
| Cable mantle size | 3.4 mm | Power support | Yes |
| Cable type | USB | USB technology | USB 2.0 |
| Colour | Aluminium | | |
| Conductor diameter | 16 x 0.08 mm | | |
| Conductor material | Tinned Copper | | |
| Connector A | USB-A Male | | |
| Connector B | USB-C™ Male | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | Aluminium | | |
| Connector plating | Gold Plated | | |
| Material | Aluminium | | |
| | Nylon | | |

Packaging information:

| | |
|--------------------|---------------|
| Brand | Nedis |
| Order code | CCTB60600AL20 |
| EAN single Product | 5412810262694 |
| EAN Inner Carton | 5412810390151 |
| EAN Outer Carton | 5412810361915 |
| Packaging | Cover box |
| Package contents | USB cable |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|--------|
| 1 | 35 mm | 245 mm | 85 mm | 97 g |
| 10 | 175 mm | 245 mm | 175 mm | 1094 g |
| 60 | 380 mm | 275 mm | 530 mm | 7300 g |

