


**Coax Cable | IEC (Coax) Male | IEC (Coax) Female | Nickel Plated | 90 dB | 75 Ohm | Double Shielded | 25.0 m | Round | PVC | White | Envelope**

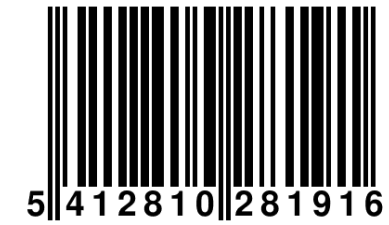

**Product specifications CSGP40000WT250:**

Cable design	Round	Insulation material	PE
Cable length	25.0 m	Material	PVC
Cable mantle material	PVC	Number of products in package	1 pcs
Cable mantle size	5.0 mm	Packaging	Envelope
Cable type	Coax	Shielding	Double Shielded
Colour	White	Signal to Noise Ratio	90 dB
Conductor diameter	0.50 mm		
Conductor material	CCS		
Connector A	IEC (Coax) Male		
Connector B	IEC (Coax) Female		
Connector design - side A	Straight		
Connector design - side B	Straight		
Connector material	PVC		
Connector plating	Nickel Plated		
Dielectric diameter	2.7 mm		
Impedance	75 Ohm		

**Packaging information:**

Brand	Nedis
Order code	CSGP40000WT250
EAN single Product	5412810281916
EAN Inner Carton	5412810398140
EAN Outer Carton	5412810348213
Packaging	Envelope
Package contents	1x Coax Cable 90dB

Quantity	L x	W x	H (mm)	Weight
1	60 mm	230 mm	180 mm	576 g
1	200 mm	50 mm	210 mm	545 g
5	195 mm	245 mm	315 mm	2997 g
20	345 mm	505 mm	395 mm	12640 g
20	340 mm	337 mm	230 mm	12730 g

