


Coax Cable | IEC (Coax) Male | IEC (Coax) Female | Nickel Plated | 120 dB | 75 Ohm | Quad Shielded | 3.00 m | Round | PVC | White | Envelope

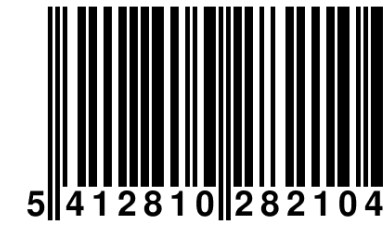

Product specifications CSGP40020WT30:

| | | | |
|---------------------------|-------------------|-------------------------------|---------------|
| Cable design | Round | Insulation material | PE |
| Cable length | 3.00 m | Material | PVC |
| Cable mantle material | PVC | Number of products in package | 1 pcs |
| Cable mantle size | 6.0 mm | Packaging | Envelope |
| Cable type | Coax | Shielding | Quad Shielded |
| Colour | White | Signal to Noise Ratio | 120 dB |
| Conductor diameter | 0.50 mm | | |
| Conductor material | OFC | | |
| Connector A | IEC (Coax) Male | | |
| Connector B | IEC (Coax) Female | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | PVC | | |
| Connector plating | Nickel Plated | | |
| Dielectric diameter | 3.1 mm | | |
| Impedance | 75 Ohm | | |

Packaging information:

| | |
|--------------------|---------------------|
| Brand | Nedis |
| Order code | CSGP40020WT30 |
| EAN single Product | 5412810282104 |
| EAN Inner Carton | 5412810362011 |
| EAN Outer Carton | 5412810348251 |
| Packaging | Envelope |
| Package contents | 1x Coax Cable 120dB |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 30 mm | 230 mm | 80 mm | 158 g |
| 50 | 250 mm | 355 mm | 430 mm | 8740 g |
| 100 | 450 mm | 380 mm | 520 mm | 18440 g |

