


**Coax Cable | IEC (Coax) Male | IEC (Coax) Female | Nickel Plated | 120 dB | 75 Ohm | Quad Shielded | 3.00 m | Round | PVC | White | Envelope**

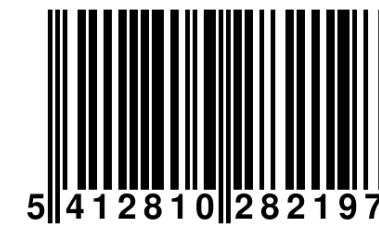

**Product specifications CSGP40120WT30:**

Cable design	Round	Insulation material	PE
Cable length	3.00 m	Material	PVC
Cable mantle material	PVC	Number of products in package	1 pcs
Cable mantle size	6.0 mm	Packaging	Envelope
Cable type	Coax	Shielding	Quad Shielded
Colour	White	Signal to Noise Ratio	120 dB
Conductor diameter	0.50 mm		
Conductor material	OFC		
Connector A	IEC (Coax) Male		
Connector B	IEC (Coax) Female		
Connector design - side A	Angled 90°		
Connector design - side B	Angled 90°		
Connector material	PVC		
Connector plating	Nickel Plated		
Dielectric diameter	3.1 mm		
Impedance	75 Ohm		

**Packaging information:**

Brand	Nedis
Order code	CSGP40120WT30
EAN single Product	5412810282197
EAN Inner Carton	5412810348701
EAN Outer Carton	5412810348718
Packaging	Envelope
Package contents	1x Coax Cable 120dB

Quantity	L x	W x	H (mm)	Weight
1	30 mm	230 mm	80 mm	158 g
50	250 mm	365 mm	425 mm	8740 g
100	445 mm	375 mm	520 mm	18200 g

