


Coax Cable | IEC (Coax) Male | IEC (Coax) Female | Nickel Plated | 120 dB | 75 Ohm | Quad Shielded | 20.0 m | Round | PVC | White | Polybag

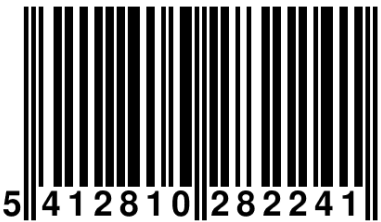

Product specifications CSGP40120WT200:

Cable design	Round	Insulation material	PE
Cable length	20.0 m	Material	PVC
Cable mantle material	PVC	Number of products in package	1 pcs
Cable mantle size	6.0 mm	Packaging	Polybag
Cable type	Coax	Shielding	Quad Shielded
Colour	White	Signal to Noise Ratio	120 dB
Conductor diameter	0.50 mm		
Conductor material	OFC		
Connector A	IEC (Coax) Male		
Connector B	IEC (Coax) Female		
Connector design - side A	Angled 90°		
Connector design - side B	Angled 90°		
Connector material	PVC		
Connector plating	Nickel Plated		
Dielectric diameter	3.1 mm		
Impedance	75 Ohm		

Packaging information:

Brand	Nedis
Order code	CSGP40120WT200
EAN single Product	5412810282241
EAN Inner Carton	5412810392957
EAN Outer Carton	5412810369843
Packaging	Polybag
Package contents	1x Coax Cable 120dB

Quantity	L x	W x	H (mm)	Weight
1	175 mm	55 mm	260 mm	805 g
10	310 mm	290 mm	250 mm	7998 g
20	335 mm	310 mm	505 mm	17400 g

