


Coax Cable | IEC (Coax) Male | IEC (Coax) Male | Nickel Plated | 90 dB | 75 Ohm | Double Shielded | 1.50 m | Round | PVC | Black | Envelope

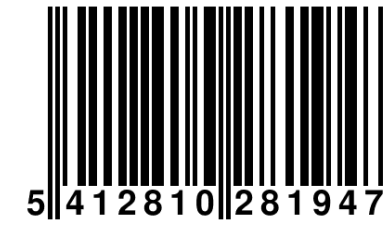

Product specifications CSGP40200BK15:

| | | | |
|---------------------------|-----------------|-------------------------------|-----------------|
| Cable design | Round | Insulation material | PE |
| Cable length | 1.50 m | Material | PVC |
| Cable mantle material | PVC | Number of products in package | 1 pcs |
| Cable mantle size | 5.0 mm | Packaging | Envelope |
| Cable type | Coax | Shielding | Double Shielded |
| Colour | Black | Signal to Noise Ratio | 90 dB |
| Conductor diameter | 0.50 mm | | |
| Conductor material | CCS | | |
| Connector A | IEC (Coax) Male | | |
| Connector B | IEC (Coax) Male | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | PVC | | |
| Connector plating | Nickel Plated | | |
| Dielectric diameter | 2.7 mm | | |
| Impedance | 75 Ohm | | |

Packaging information:

| | |
|--------------------|--------------------|
| Brand | Nedis |
| Order code | CSGP40200BK15 |
| EAN single Product | 5412810281947 |
| EAN Inner Carton | 5412810362080 |
| EAN Outer Carton | 5412810348329 |
| Packaging | Envelope |
| Package contents | 1x Coax Cable 90dB |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 30 mm | 230 mm | 55 mm | 58 g |
| 50 | 430 mm | 95 mm | 485 mm | 2780 g |
| 200 | 445 mm | 390 mm | 500 mm | 11920 g |

