


DisplayPort Cable | DisplayPort Male | DisplayPort Male | 8K@60Hz | Nickel Plated | 2.00 m | Round | PVC | Black | Box

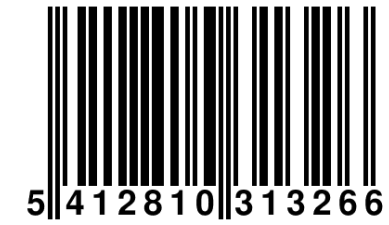

Product specifications CCGB37014BK20:

| | | | |
|---------------------------|-------------------------|-------------------------------|----------------------|
| Adapter design | Straight | Connector plating | Nickel Plated |
| Aspect ratio | 16:9 | Material | ABS |
| AWG value | 28 | | PVC |
| Cable design | Round | Maximum bandwidth | 32.4 Gbps |
| Cable length | 2.00 m | Maximum resolution | 8K@60Hz |
| Cable mantle material | PVC | Number of products in package | 1 pcs |
| Cable mantle size | 7.3 mm | Packaging | Box |
| Cable type | DisplayPort | Resolution standard | 8K UHD |
| Colour | Black | Shielding | Shielded |
| Conductor diameter | 7 x 0.127 mm | Supported resolutions | 1080p@120Hz |
| Conductor material | Tinned Copper | | 1080p@60Hz |
| Connector A | DisplayPort Male | | 4K@120Hz |
| Connector B | DisplayPort Male | | 4K@30Hz |
| Connector design - side A | Straight | | 4K@60Hz |
| Connector design - side B | Straight | | 8K@60Hz |
| Connector material | ABS | Version | 1.4 |

Packaging information:

| | |
|--------------------|--------------------------|
| Brand | Nedis |
| Order code | CCGB37014BK20 |
| EAN single Product | 5412810313266 |
| EAN Inner Carton | 5412810342440 |
| EAN Outer Carton | 5412810340125 |
| Packaging | Box |
| Package contents | DisplayPort cable |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 30 mm | 230 mm | 85 mm | 155 g |
| 10 | 95 mm | 250 mm | 325 mm | 1660 g |
| 40 | 350 mm | 275 mm | 385 mm | 7300 g |
| 60 | 315 mm | 540 mm | 340 mm | 10000 g |

