


IEC (Coax) CAT6 Combi Cable | RG58 | 75 Ohm | Double Shielded | ECA | 10.0 m | Round | White | Reel

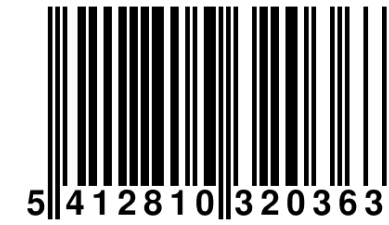

Product specifications CSGR4500WT100:

| | | | |
|-------------------------------|-------------|-----------|-----------------|
| Cable design | Round | Shielding | Double Shielded |
| Cable length | 10.0 m | | |
| Cable mantle material | PVC | | |
| Cable mantle size | 10.4 mm | | |
| Cable type | Coax / Cat6 | | |
| Coax type | RG58 | | |
| Colour | White | | |
| Conductor diameter | 0.58 mm | | |
| Conductor material | OFC | | |
| CPR class | ECA | | |
| Dielectric diameter | 2.6 mm | | |
| Frequency | 250 MHz | | |
| Impedance | 75 Ohm | | |
| Insulation material | PE | | |
| Material | PVC | | |
| Maximum bandwidth | 1 Gbps | | |
| Number of products in package | 1 pcs | | |
| Packaging | Reel | | |

Packaging information:

| | |
|--------------------|---------------|
| Brand | Nedis |
| Order code | CSGR4500WT100 |
| EAN single Product | 5412810320363 |
| EAN Inner Carton | |
| EAN Outer Carton | 5412810354498 |
| Packaging | Reel / Rol |
| Package contents | |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|--------|
| 1 | 180 mm | 95 mm | 180 mm | 911 g |
| 4 | 200 mm | 235 mm | 375 mm | 4180 g |

