


Coax Cable | IEC (Coax) Male | IEC (Coax) Female | Nickel Plated | 75 Ohm | Double Shielded | 10.0 m | Round | PVC | White | Tag

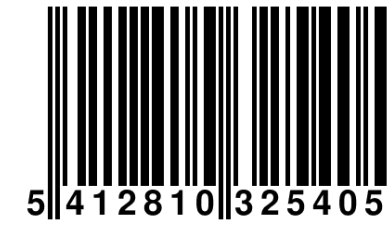

Product specifications CSGT40000WT100:

| | | | |
|---------------------------|-------------------|-------------------------------|-----------------|
| Cable design | Round | Insulation material | PE |
| Cable length | 10.0 m | Material | PVC |
| Cable mantle material | PVC | Number of products in package | 1 pcs |
| Cable mantle size | 5.0 mm | Packaging | Tag |
| Cable type | Coax | Shielding | Double Shielded |
| Colour | White | | |
| Conductor diameter | 0.50 mm | | |
| Conductor material | CCS | | |
| Connector A | IEC (Coax) Male | | |
| Connector B | IEC (Coax) Female | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | PVC | | |
| Connector plating | Nickel Plated | | |
| Dielectric diameter | 2.7 mm | | |
| Impedance | 75 Ohm | | |

Packaging information:

| | |
|--------------------|----------------|
| Brand | Nedis |
| Order code | CSGT40000WT100 |
| EAN single Product | 5412810325405 |
| EAN Inner Carton | |
| EAN Outer Carton | 5412810370191 |
| Package contents | |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 50 mm | 50 mm | 50 mm | 251 g |
| 1 | 125 mm | 125 mm | 125 mm | 251 g |
| 80 | 375 mm | 390 mm | 450 mm | 20840 g |

