


Digital Audio Converter | 1-way | Connection input: 1x S/PDIF | Connection output: TosLink Female | Manual | Black

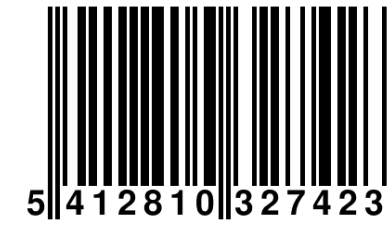

Product specifications ACON2505BK:

| | | | |
|-------------------------------------|-------------------------|-----------------------------------|---|
| Colour | Black | Power consumption in standby mode | 0.5 W |
| Connection input | 1x S/PDIF | Power on LED indicator | Yes |
| Connection output | TosLink Female | Power source type | USB Powered |
| Controlling method | Manual | Power switch | Yes |
| Data transfer direction | 1-way | Supported bitrates | 44.1 kHz 24-bit 48 kHz 24-bit 96 kHz 24-bit |
| Device power input connection(s) | DC 9 x 5.5 mm | Supported formats | AAC Dolby Digital Dolby Digital 5.1 DTS DTS5.1 MPEG-2 PCM |
| Device type | Digital Audio Converter | | |
| Input current | 0.6 A | | |
| Input voltage | 5 V DC | | |
| Material | ABS | | |
| Number of products in package | 1 pcs | | |
| Power cable length | 1.80 m | | |
| Power cable side A | USB | | |
| Power cable side B | DC 9 x 5.5 mm | | |
| Power consumption in operating mode | 1.0 W | | |

Packaging information:

| | |
|--------------------|--|
| Brand | Nedis |
| Order code | ACON2505BK |
| EAN single Product | 5412810327423 |
| EAN Inner Carton | |
| EAN Outer Carton | 5412810444014 |
| Packaging | Giftbox with eurolock |
| Package contents | Audio converter 1.5 m DC to USB power cable |

Read more online

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 30 mm | 145 mm | 80 mm | 104 g |
| 100 | 340 mm | 320 mm | 425 mm | 11000 g |

