


3G / 4G / 5G Antenna | 5G | Indoor & Outdoor | 698-5000 MHz | Gain: 11 dB | 4.00 m | White

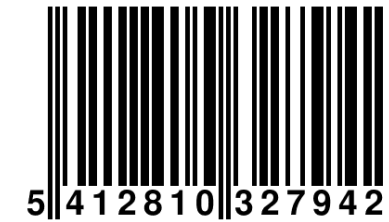

Product specifications ANOR5G10WT:

| | | | |
|-------------------------------|------------------|------------------------------------|---------------|
| Cable length | 4.00 m | Signal type | 5G |
| Colour | White | Vertical beam width | 50 ° |
| Connector type | SMA Male | Voltage standing wave ratio (VSWR) | Less than 2.5 |
| Diameter of mounting pole | 30-53 mm | | |
| Front-back ratio | 21 dB | | |
| Gain | 11 dB | | |
| Horizontal beam width | 60 ° | | |
| Impedance | 50 Ohm | | |
| Indoor / outdoor | Indoor & Outdoor | | |
| Lightning protection | Yes | | |
| Material | Aluminium PVC | | |
| Number of elements | 1 | | |
| Number of products in package | 1 pcs | | |
| Polarisation | Linear | | |
| Rated wind velocity | 120 km/h | | |
| Reception frequency range | 698-5000 MHz | | |

Packaging information:

| | |
|--------------------|------------------------|
| Brand | Nedis |
| Order code | ANOR5G10WT |
| EAN single Product | 5412810327942 |
| EAN Inner Carton | |
| EAN Outer Carton | 5412810383160 |
| Packaging | Giftbox |
| Package contents | Antenna 4.0 m cable |

Read more online

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 215 mm | 90 mm | 570 mm | 1270 g |
| 8 | 455 mm | 370 mm | 590 mm | 11140 g |

