


Bluetooth® Transmitter Receiver | Connection input: 1x AUX / 1x SPDIF | Connection output: 1x AUX / 1x SPDIF | AptX™ Low latency / AptX™ / SBC | Up to 2 Devices

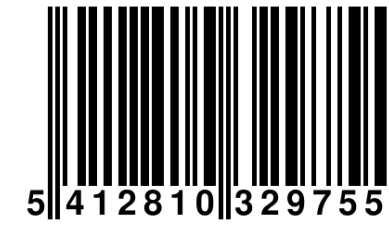

Product specifications BTTC200BK:

Automatic power off function	Yes	Material	ABS	Supported wireless technology	AVRCP
Automatic power off time	10 min	Maximum battery charging time	2 hrs	Transmit frequency range	Bluetooth®
Batteries included	Built-in Lithium-Ion	Maximum transmit antenna gain	0 dBi		2402 - 2480 MHz
Battery capacity	450 mAh	Maximum transmit power	1.31 dBm		
Battery play time	22 hrs	Number of products in package	1 pcs		
Battery type	Built-In Lithium-Polymer	Power cable length	0.80 m		
Bluetooth® signal range	10 m	Power cable side A	USB		
Bluetooth® version	5.0	Power cable side B	Micro USB		
Colour	Black	Power plug	Micro USB		
Connection input	1x AUX	Power source type	Battery Powered		
	1x SPDIF	Simultaneously connectable devices	Up to 2 Devices		
Connection output	1x AUX	Supported Bluetooth® codecs	AptX™ Low latency		
	1x SPDIF		AptX™		
Device power input connection(s)	Micro USB		SBC		
Input current	1.0 A	Supported Bluetooth® profiles	A2DP		
Input voltage	5 V DC				

Packaging information:

Brand	Nedis
Order code	BTTC200BK
EAN single Product	5412810329755
EAN Inner Carton	5412810396238
EAN Outer Carton	5412810383269
Packaging	Giftbox with eurolock
Package contents	Bluetooth® transmitter receiver Toslink male to male cable

Read more online

Quantity	L x	W x	H (mm)	Weight
1	50 mm	175 mm	80 mm	165 g
10	185 mm	95 mm	540 mm	1855 g
100	405 mm	485 mm	555 mm	19200 g

