


USB Cable | USB 2.0 | USB Type-C™ Male | USB Type-C™ Male | 480 Mbps | Gold Plated | 1.00 m | Round | Braided / Nylon | Silver | Cover Window Box

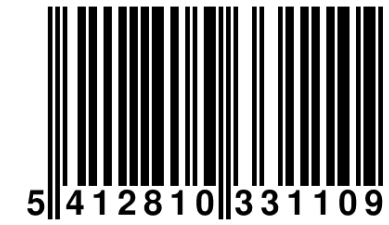

Product specifications CCTB60800AL10:

| | | | |
|---------------------------|-------------------------|-----------------------|------------------------|
| Connector design - side B | Straight | AWG value | 30/22 |
| Connector design - side A | Straight | Output current | 5 A |
| Cable length | 1.00 m | Cable mantle size | 3.6 mm |
| Cable design | Round | Material | Nylon |
| Connector plating | Gold Plated | | Aluminium Alloy |
| Connector material | PVC | Maximum transfer rate | 480 Mbps |
| Packaging | Cover Window Box | | |
| USB technology | USB 2.0 | | |
| Cable mantle material | Braided | | |
| | Nylon | | |
| Cable type | USB | | |
| Connector A | USB Type-C™ Male | | |
| Connector B | USB Type-C™ Male | | |
| Colour | Silver | | |
| Output power | 100 W | | |

Packaging information:

| | |
|------------------|----------------------|
| Brand | Nedis |
| Order code | CCTB60800AL10 |
| EAN number | 5412810331109 |
| Packaging | |
| Package contents | |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|--------|
| 1 | 25 mm | 250 mm | 85 mm | 73 g |
| 10 | 125 mm | 265 mm | 175 mm | 854 g |
| 60 | 375 mm | 290 mm | 390 mm | 5760 g |

