


USB Cable | USB 3.2 Gen 1 | USB-C™ Male | USB-C™ Female | 5 W | 5 Gbps | Nickel Plated | 2.00 m | Round | PVC | Black | Envelope

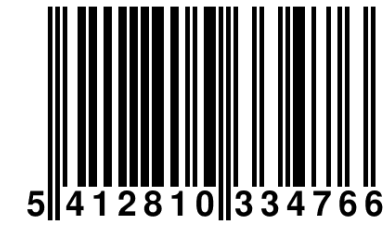

Product specifications CCGP64010BK20:

| | | | |
|---------------------------|---------------|----------------|---------------|
| AWG value | 32/22 | Output power | 5 W |
| Cable design | Round | Packaging | Envelope |
| Cable length | 2.00 m | USB technology | USB 3.2 Gen 1 |
| Cable mantle material | PVC | | |
| Cable mantle size | 5.2 mm | | |
| Cable type | USB | | |
| Colour | Black | | |
| Conductor material | Tinned Copper | | |
| Connector A | USB-C™ Male | | |
| Connector B | USB-C™ Female | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | PVC | | |
| Connector plating | Nickel Plated | | |
| Material | PVC | | |
| Maximum transfer rate | 5 Gbps | | |
| Output current | 3.0 A | | |

Packaging information:

| | |
|--------------------|---------------------|
| Brand | Nedis |
| Order code | CCGP64010BK20 |
| EAN single Product | 5412810334766 |
| EAN Inner Carton | 5412810339020 |
| EAN Outer Carton | 5412810338030 |
| Packaging | Envelope |
| Package contents | USB 3.2 Gen 1 Cable |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 55 mm | 230 mm | 30 mm | 80 g |
| 50 | 435 mm | 95 mm | 490 mm | 4100 g |
| 200 | 450 mm | 395 mm | 505 mm | 17060 g |

