


Lightning Cable | USB 2.0 | Apple Lightning 8-Pin | USB-C™ Male | 480 Mbps | Nickel Plated | 1.00 m | Round | PVC | White | Label

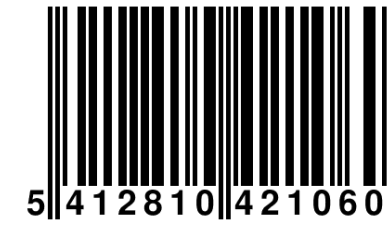

Product specifications CCGL39650WT10:

| | | | |
|---------------------------|-----------------------|-------------------------------|----------|
| AWG value | 30/24 | Maximum transfer rate | 480 Mbps |
| Cable design | Round | Number of products in package | 1 pcs |
| Cable length | 1.00 m | OTG | No |
| Cable mantle material | PVC | Output power | 18 W |
| Cable mantle size | 3.2 mm | Packaging | Label |
| Cable type | USB 2.0 | USB technology | USB 2.0 |
| Colour | White | | |
| Conductor diameter | 11 x 0.08 mm | | |
| Conductor material | Tinned Copper | | |
| Connector A | Apple Lightning 8-Pin | | |
| Connector B | USB-C™ Male | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | PVC | | |
| Connector plating | Nickel Plated | | |
| Material | PVC | | |

Packaging information:

| | |
|--------------------|---------------|
| Brand | Nedis |
| Order code | CCGL39650WT10 |
| EAN single Product | 5412810421060 |
| EAN Inner Carton | 5412810429332 |
| EAN Outer Carton | 5412810433490 |
| Packaging | Label |
| Package contents | USB cable |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 100 mm | 190 mm | 10 mm | 31 g |
| 50 | 130 mm | 195 mm | 285 mm | 1660 g |
| 300 | 315 mm | 425 mm | 415 mm | 10280 g |

