


Coax Cat6 Combi Cable | IEC (Coax) Male / RJ45 Male | IEC (Coax) Female / RJ45 Male | Nickel Plated | RG58 | 75 Ohm | Double Shielded | 3.00 m | Round | PVC | White | Label

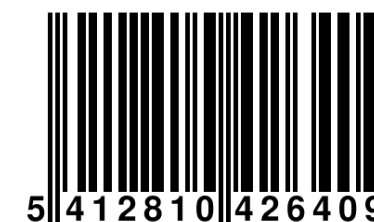

Product specifications CSGL4500WT30:

| | | | |
|---------------------------|--------------------------------|-------------------------------|-----------------|
| Bandwidth | 250 mHz | Impedance | 75 Ohm |
| Cable design | Round | Material | PVC |
| Cable length | 3.00 m | Number of products in package | 1 pcs |
| Cable mantle material | PVC | Packaging | Label |
| Cable mantle size | 10.4 mm | Shielding | Double Shielded |
| Cable type | Coax / Cat6 | | |
| Coax type | RG58 | | |
| Colour | White | | |
| Connector A | IEC (Coax) Male RJ45 Male | | |
| Connector B | IEC (Coax) Female RJ45 Male | | |
| Connector design - side A | Straight | | |
| Connector design - side B | Straight | | |
| Connector material | Bare Copper | | |
| Connector plating | Nickel Plated | | |

Packaging information:

| | |
|--------------------|--------------------------------|
| Brand | Nedis |
| Order code | CSGL4500WT30 |
| EAN single Product | 5412810426409 |
| EAN Inner Carton | 5412810431946 |
| EAN Outer Carton | 5412810437405 |
| Packaging | Label |
| Package contents | Coax- / CAT6 Combination Cable |

| Quantity | L x | W x | H (mm) | Weight |
|----------|--------|--------|--------|---------|
| 1 | 30 mm | 210 mm | 180 mm | 271 g |
| 20 | 195 mm | 285 mm | 280 mm | 5460 g |
| 40 | 310 mm | 310 mm | 410 mm | 11200 g |

