


HDMI™ Matrix Switch | 2 x 4 port(s) | 4x HDMI™ Input | 1x Optical S/PDIF / 2x HDMI™ Output / 2x RCA Male | 4K@60Hz | 18 Gbps | Remote controlled | Metal | Anthracite

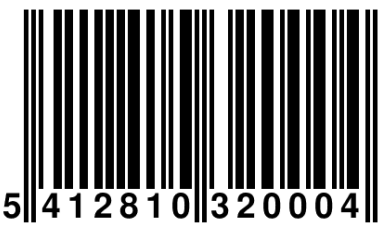

Product specifications VMAT3472AT:

Aspect ratio	16:9	Device power input connection(s)	DC 9.0 x 5.5 mm	Remote controlled	Yes
Bandwidth	600 mHz	Device type	HDMI™ Matrix Switch	Required batteries (included)	1x CR2032
Clock frequency	0 MHz	EDID settings	Auto	Resolution standard	4K UHD
Colour	Anthracite	Input current	2 A	SmartLife	No
Colour formats	RGB	Input voltage	5 V DC	Supported resolutions	1080p@60Hz
	YCbCr 4:2:0	Material	Metal		480p@60Hz
	YCbCr 4:2:2	Maximum bandwidth	18 Gbps		4K@30Hz
	YCbCr 4:4:4	Maximum resolution	4K@60Hz		4K@60Hz
Connection input	4x HDMI™ Input	Ports	2 x 4 port(s)		576p@60Hz
Connection output	1x Optical S/PDIF	Power adapter cable length	1.00 m		720p@60Hz
	2x HDMI™ Output	Power consumption in operating mode	5 W	Supported technology	3D
	2x RCA Male	Power consumption in standby mode	1 W		Dolby True HD
Controlling method	Manual	Power plug	Type C (CEE 7/16)		DTS-HD-Master Audio
	Remote Control	Power source type	Mains Powered		HDCP
					LPCM
					44KHz,48KHz,96KHz

Packaging information:

Brand	Nedis
Order code	VMAT3472AT
EAN single Product	5412810320004
EAN Inner Carton	
EAN Outer Carton	5412810356225
Packaging	Giftbox
Package contents	HDMI™ matrix
	Power adapter

Read more online

Quantity	L x	W x	H (mm)	Weight
1	215 mm	50 mm	290 mm	1060 g
10	300 mm	235 mm	550 mm	11120 g

