


**Electric Vehicle Cable | Cable Type 2 | 32 A | 22000 W | 3-Phases | 5.00 m | Black | Gift Box**

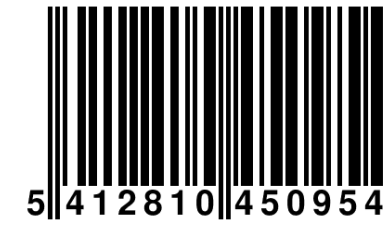

**Product specifications EVCA22KWBK50:**

Cable mantle material	TPE	Output current	32 A
Cable mantle size	6 mm	Output power	22000 W
Cable type	Cable Type 2	Packaging	Gift Box
Colour	Black	Power cable length	5.00 m
Conductor diameter	5 x 2.55 mm <sup>2</sup>	Power cable side A	EN62199-2 Type 2
Conductor material	Bare Copper	Power cable side B	EN62199-2 Type 2
Connector design - side A	Straight	Power plug	EN62199-2 Type 2
Connector design - side B	Straight	Resistor coding	220 Ohm
Connector material	ABS	SmartLife	No
Contact resistance	0.5 m	Terminal temperature rise	223 °C
Input voltage	400 V AC	Withstand voltage	2000 V
Insertion life cycle	10000	Working humidity	5 % - 95% non condensed %
Insulation resistance	1000 M		
IP rating	IP55		
Material	TPU		
Number of phases	3-Phases		
Number of products in package	1 pcs		
Operating temperature range	30 °C		

**Packaging information:**

Brand	Nedis
Order code	EVCA22KWBK50
EAN single Product	5412810450954
EAN Inner Carton	
EAN Outer Carton	5412810451050
Packaging	Giftbox
Package contents	▪ 5 metre Type 2 22kW charging cable

**Read more online**

Quantity	L x	W x	H (mm)	Weight
1	380 mm	100 mm	385 mm	3765 g
4	400 mm	440 mm	405 mm	16120 g

