


CATV Power Inserter | 40-862 MHz | Insertion loss: -5 dB | 75 Ohm | ABS | White

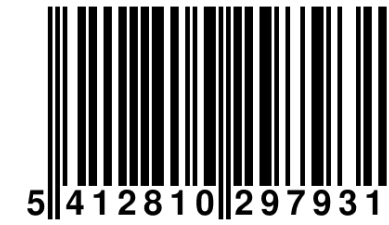

Product specifications SPIN100WT:

Colour	White	Satellite frequency range	40-862 MHz
Connector type	F-connector		
Impedance	75 Ohm		
Input current	0.1 A		
Input voltage	24 V DC		
Insertion loss	-5 dB		
Material	ABS		
Number of inputs	1		
Number of outputs	2		
Number of products in package	1 pcs		
Power cable length	1.80 m		
Power consumption in operating mode	5.5 W		
Power plug	Type C (CEE 7/16)		
Power source type	Mains Powered		
Satellite accessory type	CATV Power Inserter		

Packaging information:

Brand	Nedis
Order code	SPIN100WT
EAN single Product	5412810297931
EAN Inner Carton	5412810396849
EAN Outer Carton	5412810385034
Packaging	White box
Package contents	Power inserter

Quantity	L x	W x	H (mm)	Weight
1	45 mm	170 mm	110 mm	367 g
10	260 mm	125 mm	285 mm	3820 g
50	275 mm	635 mm	295 mm	19640 g

