


Power Inverter Modified Sine Wave | Input voltage: 24 V DC | Device power output connection(s): Type F (CEE 7/3) | 230 V AC 50 Hz | 1000 W | Peak power output: 2400 W | Battery Clamps | Silver

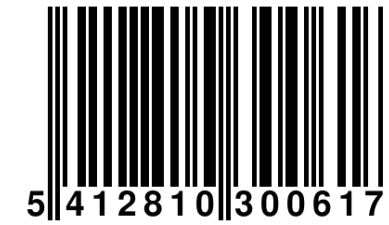

Product specifications PIMS100024:

Colour	Silver		
Device power output connection(s)	Type F (CEE 7/3)	Safety functions	Low-Battery Shutdown Protection
Efficiency	90 %		Output Short-Circuit Protection
Fuse	Yes		Overload Protection
Input type	Battery Clamps		Reverse Battery-Polarity Protection
Input voltage	24 V DC		Thermal Protection
Material	Aluminium		Too High Input Voltage Protection
Maximum power consumption	2400 W	Works with remote control	Yes
Number of products in package	1 pcs		
Number of sockets	2 pcs		
Output power	1000 W		
Output voltage	230 V AC 50 Hz		
Output waveform	Modified Sine Wave		
Peak power output	2400 W		
Power plug	Battery Clamps		
Power source type	Car Powered		

Packaging information:

Brand	Nedis
Order code	PIMS100024
EAN single Product	5412810300617
EAN Inner Carton	
EAN Outer Carton	5412810373864
Packaging	Giftbox
Package contents	Inverter Quick start guide

Quantity	L x	W x	H (mm)	Weight
1	290 mm	140 mm	385 mm	4340 g
2	310 mm	305 mm	410 mm	9380 g

