


Car FM Transmitter | Gooseneck | Hands free calling | 2.0 " | LED Screen | Bluetooth® | QC 3.0 / 5.0 V DC / 2.4 A | Fast charging | Bass boost | Google Assistant / Siri | Black / Grey

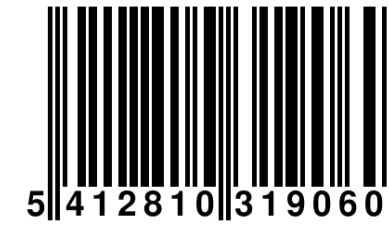

Product specifications CATR101BK:

| | | | |
|-----------------------------------|------------------|-------------------------------|-------------|
| Bass boost | Yes | Output current | 2.4 A |
| Bluetooth® version | 5.0 | | 3 A |
| Built-in microphone | Yes | Output voltage | 12 V DC |
| Colour | Black | | 3.6 V DC |
| | Grey | | 5 V DC |
| Device power output connection(s) | 2x USB | | 6 V DC |
| Fast charging | Yes | | 9 V DC |
| FM frequency range | 87.6 - 107.9 MHz | Power plug | Car Adapter |
| Frequency response | 20 Hz - 20 KHz | Power source type | Car Powered |
| Hands free calling | Yes | Screen | LED Screen |
| Input current | 2 A | Screen size | 2.0 " |
| Input voltage | 12 - 24 V DC | Signal to Noise Ratio | 65 dB |
| Material | ABS | Supported audio codec | FLAC |
| Maximum transmit antenna gain | -0.2 dBi | | MP3 |
| Maximum transmit power | 4 dBm | | WAV |
| Number of products in package | 1 pcs | Supported Bluetooth® profiles | A2DP |
| | | | HFP |
| | | Supported radio band | FM |

| | | | | |
|-----------------------------|---------------------------|--------|--------|--------|
| Brand | Nedis | | | |
| Order code | CATR101BK | | | |
| EAN single Product | 5412810319060 | | | |
| EAN Inner Carton | 5412810396283 | | | |
| Transmitter frequency range | 2402 - 2480 MHz | | | |
| EAN Outer Carton | 5412810383320 | | | |
| Transmitter design | Gooseneck | | | |
| Packaging | Giftbox with eurolock | | | |
| Package contents | Bluetooth® FM transmitter | | | |
| | 3.5 mm to 3.5mm cable | | | |
| Voice control support | Google Assistant | | | |
| | Siri | | | |
| Quantity | L x | W x | H (mm) | Weight |
| 1 | 75 mm | 185 mm | 105 mm | 158 g |
| 6 | 225 mm | 115 mm | 385 mm | 1100 g |
| 36 | 410 mm | 385 mm | 460 mm | 7500 g |

Packaging information:

