




Audio Baby Monitor | FHSS (Frequency-Hopping Spread Spectrum) | Range: 300 m | Battery Powered / Mains Powered | Grey / White

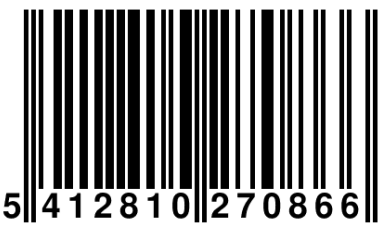

Product specifications BAMO111AUWT:

Adjustable volume sensitivity	Yes	Power adapter cable length	2.05 m
Antenna gain	0 dBi	Power plug	Type C (CEE 7/16)
App available for	No App	Power source type	Battery Powered
Batteries included	No		Mains Powered
Colour	Grey	Range	300 m
	White	Required batteries (not included)	6x AAA/HR03
Expandable	No	SmartLife	No
Frequency range	2.4 - 2.47 MHz	Sound activation	Yes
Input current	0.25 A	Technology	FHSS (Frequency-Hopping Spread Spectrum)
Input voltage	100 - 240 V AC 50 Hz	Transmit frequency range	2.4 - 2.47 MHz
Material	Plastic	With talk back function	No
Maximum power consumption	6.00 W		
Maximum transmit antenna gain	0 dBi		
Maximum transmit power	19 dBm		
Microphone range	3.0 m		
Number of products in package	1 pcs		
Operating temperature range	0 - 40 °C		

Packaging information:

Brand	Nedis
Order code	BAMO111AUWT
EAN single Product	5412810270866
EAN Inner Carton	
EAN Outer Carton	5412810374519
Packaging	Giftbox
Package contents	Baby unit
	Parent unit

Read more online

Quantity	L x	W x	H (mm)	Weight
1	60 mm	210 mm	145 mm	411 g
12	305 mm	240 mm	360 mm	5520 g

