


Power Inverter Modified Sine Wave | Input voltage: 12 V DC | Device power output connection(s): Type F (CEE 7/3) | 230 V AC 50 Hz | 4000 W | Peak power output: 8000 W | Screw Terminal | Silver

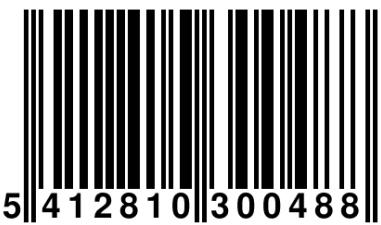

Product specifications PIMS400012:

Colour	Silver	Safety functions	Low-Battery Shutdown Protection
Device power output connection(s)	Type F (CEE 7/3)		
Efficiency	90 %		Output Short-Circuit Protection
Fuse	Yes		
Input type	Screw Terminal		Overload Protection
Input voltage	12 V DC		
Material	Aluminium		Reverse Battery-Polarity Protection
Maximum power consumption	8000 W		
Number of products in package	1 pcs		Thermal Protection
Number of sockets	2 pcs		
Output power	4000 W		Too High Input Voltage Protection
Output voltage	230 V AC 50 Hz		
Output waveform	Modified Sine Wave	SmartLife	No
Peak power output	8000 W	Works with remote control	No
Power plug	Screw Terminal		
Power source type	Car Powered		

Packaging information:

Brand	Nedis
Order code	PIMS400012
EAN single Product	5412810300488
EAN Inner Carton	
EAN Outer Carton	
Packaging	Giftbox
Package contents	Inverter 2x DC power cable

Read more online

Quantity	L x	W x	H (mm)	Weight
1	350 mm	285 mm	680 mm	14440 g

